

Introduction: RM, RA Series

Krueger's RM/RA round ceiling diffusers provide excellent performance in variable air volume systems. The round ceiling diffusers have three or four cones depending on model selected to provide a uniform appearance regardless of design specifications. Krueger's round ceiling diffusers come in three styles.

The first style, RM1/5RM1, is used when vertical throw is not needed, but the consumer needs to adjust the room air induction. This is accomplished by utilizing the two position inner cones. At position one, capacity is maximized. In position two, room air induction is increased.

The second style, RM2/5RM2/RM4/5RM4, is used when horizontal and vertical discharge is required. This is accomplished by utilizing the three position inner cones. At position one, capacity is maximized and throw is horizontal. In position two, room air induction is increased and the throw remains horizontal. When set in position three, the air projects vertically from the diffuser.

The third style, RA2/RA4, is used when horizontal and vertical discharge is required with infinite adjustability between horizontal and vertical. In the full open setting, capacity is maximized and throw is horizontal. In the full closed setting, air projects vertically from the diffuser.

Krueger's round ceiling diffusers come with a safety cable to secure the inner cones after removal. (Safety cable is optional for 12" inlet size or smaller.)

MODELS

- RM1 - Steel, 3-Cones, 2-Position Adjustments
- 5RM1 - Aluminum, 3-Cones, 2-Position Adjustments
- RM2 - Steel, 4-Cones, 3-Position Adjustments
- 5RM2 - Aluminum, 4-Cones, 3-Position Adjustments
- RM4 - Steel, 4-Cones, 3-Position Adjustments
with Large Outer Anti-smudge Cone
- 5RM4 - Aluminum, 4-Cones, 3-Position Adjustments
with Large Outer Anti-smudge Cone
- RA2 - Steel, 4-Cones, Fully Adjustable
- RA4 - Steel, 4-Cones, Fully Adjustable,
with Large Outer Anti-smudge Cone

FEATURES

- Horizontal only (RM1/5RM1) air distribution.
- Horizontal/Vertical (RM2/5RM2/RM4/5RM4/RA2/RA4) air distribution. (Units ship in vertical position.)
- Designed for heating and cooling applications.
- 360° Discharge air pattern.
- Excellent performance in variable air volume systems.
- Designed for exposed duct or hard ceiling applications.
- Units ship with core set for vertical throw.

ACCESSORIES

- Optional Safety Cable (12" Inlets or Smaller)
- Optional Round Straightening Grid

FINISHES

- Standard finish is #44 British White.
- Optional finishes available.



RM1




RM2




RA4

RM1, 5RM1 Dimensional Information

RM1, 5RM1, CROSS SECTION

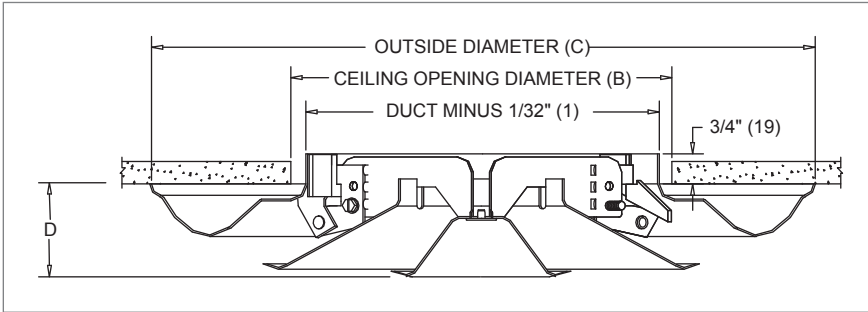

RM1, 5RM1, POSITIONS

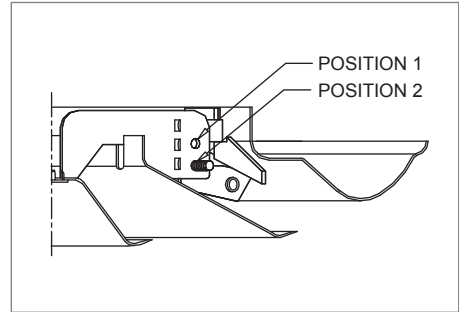


RM1, 5RM1, AVAILABLE NECK SIZES

Nominal Round Duct Size Steel (RM1)	Nominal Round Duct Size Aluminum (5RM1)	B	C	Position 1 D	Position 2 D
6"	6"	6 1/2" (165)	11 1/8" (283)	1 3/4" (44)	1 1/8" (29)
8"	8"	8 1/2" (216)	14 3/4" (375)	2 1/8" (54)	1 1/2" (38)
10"	10"	10 1/2" (267)	18 1/4" (460)	2 7/8" (73)	2 1/8" (54)
12"	12"	12 1/2" (318)	22" (559)	3 1/8" (79)	2 3/8" (60)
14"	14"	14 1/2" (368)	26" (660)	3 3/8" (86)	2 5/8" (67)
16"	16"	16 1/2" (419)	29" (737)	4" (102)	3 1/4" (83)
18"	18"	18 1/2" (470)	32 1/2" (826)	4 3/4" (121)	3 7/8" (98)
20"	-	20 1/2" (520)	36" (914)	5 7/8" (149)	4 7/8" (124)
24"	-	24 1/2" (622)	43 1/4" (1095)	7 3/4" (197)	6 5/8" (168)
30"	-	30 1/2" (775)	53 3/4" (1365)	8 1/8" (206)	6 5/8" (168)
36"	-	36 1/2" (927)	64 1/2" (1638)	10 1/8" (257)	8 3/8" (213)

NOTE: Dimensions in parentheses are mm.


RM1, 5RM1 Reference Charts

AIRFLOW VS. NC LEVEL: RM1, 5RM1 (NO DAMPER)

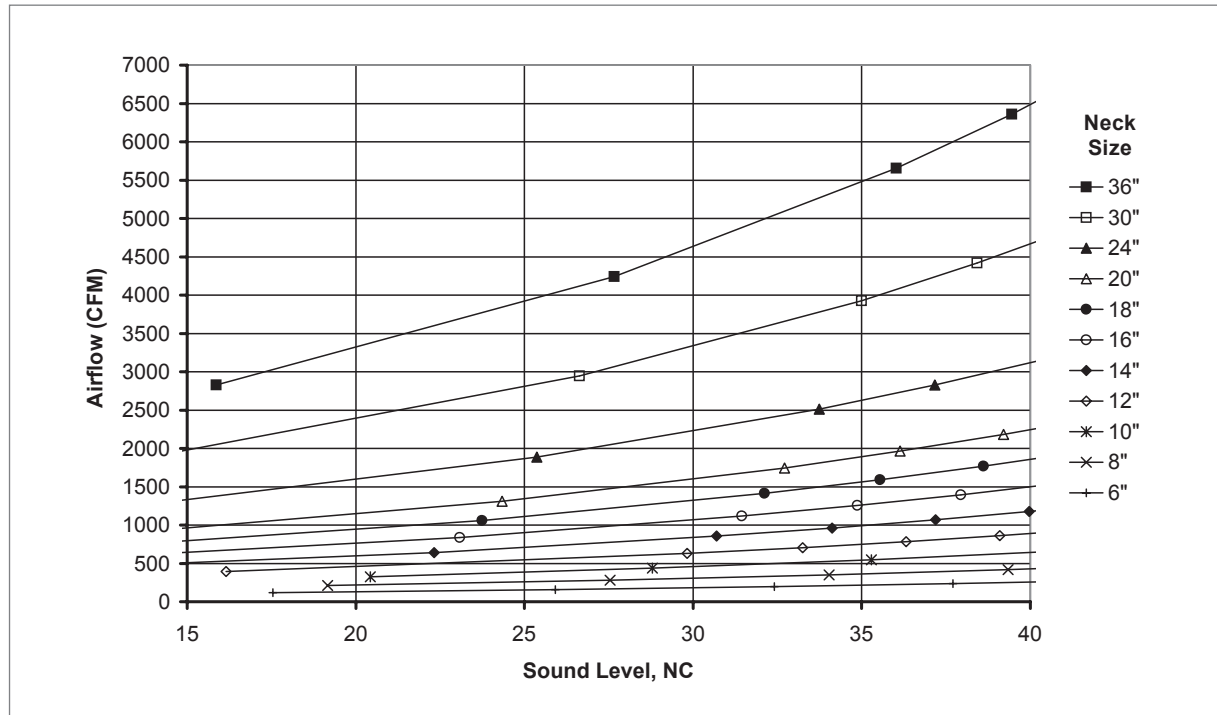


RM1, 5RM1 Reference Charts: Horizontal Throw

DIFFUSER SPACING FOR 80% ADPI: RM1, 5RM1, 6" NECK (NO DAMPER)

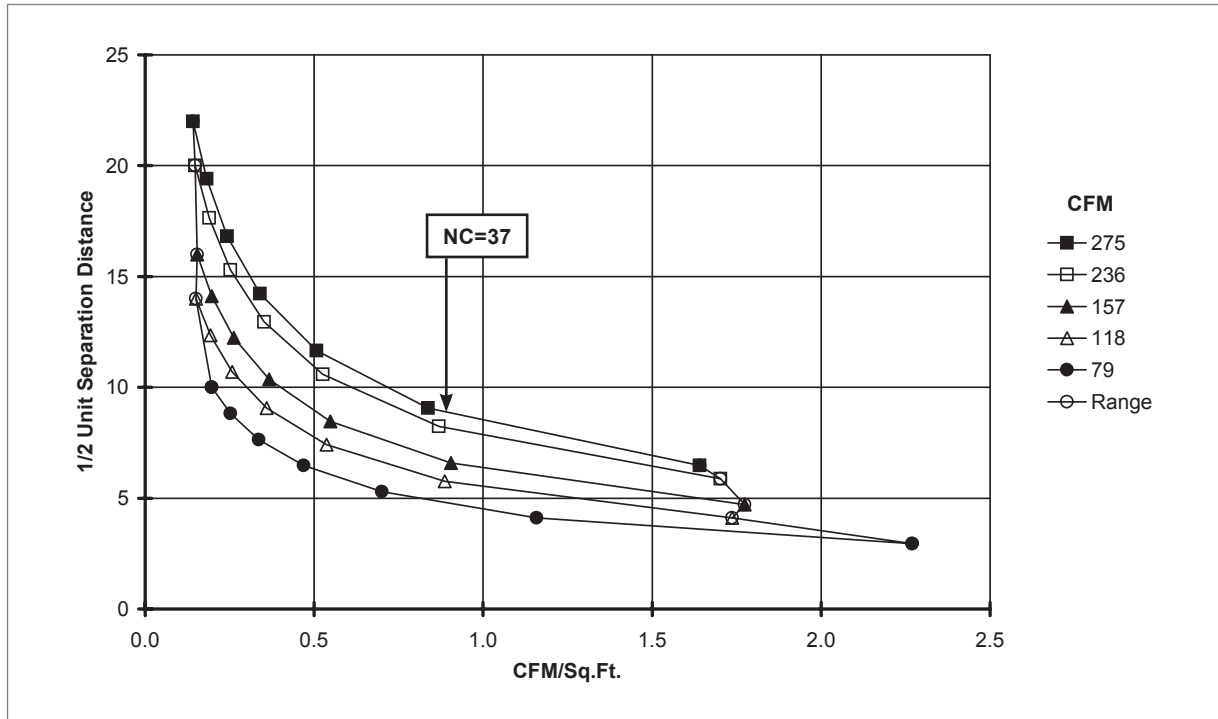

DIFFUSER SPACING FOR 80% ADPI: RM1, 5RM1, 14" NECK (NO DAMPER)

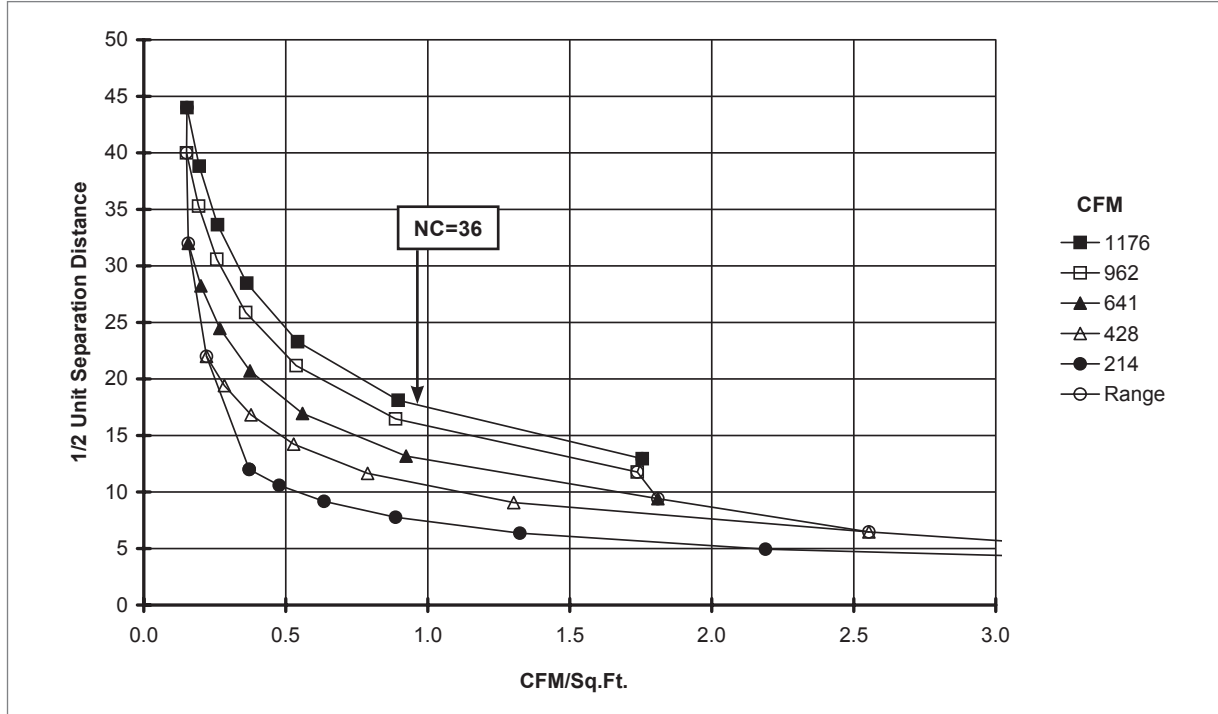

NOTES: Charts are at 20 BTUH/ft² loads. See the Engineering section of this catalog for instructions on how to read these charts and additional ADPI information.

RM1, 5RM1 Performance Data: Horizontal Throw

IP/METRIC DATA: RM1, 5RM1 (NO DAMPER)

	IP Data						Metric Data							
	Neck	Air	Position 2		Position 1	Position 2	Pos	Pos	Neck	Air	Position 2		Position 1	Position 2
	Vel	Flow	Ps	Pt	Throw	Throw	1	2	Vel	Flow	Ps	Pt	Throw	Throw
	FPM	CFM	"WG	"WG	ft	ft	NC	NC	m/s	L/s	Pa	Pa	m	m
6" Dia.	400	79	0.037	.047	2 - 2 - 5	2 - 3 - 6	-	-	2.03	37	9.3	11.7	0.5 - 0.7 - 1.5	0.6 - 0.9 - 1.7
	600	118	0.084	.106	2 - 4 - 7	3 - 4 - 7	-	18	3.05	56	20.8	26.4	0.7 - 1.1 - 2.1	0.9 - 1.3 - 2.1
	800	157	0.149	.189	3 - 5 - 8	4 - 6 - 8	19	26	4.06	74	37.1	47.0	1.0 - 1.5 - 2.4	1.1 - 1.7 - 2.5
	1000	196	0.233	.295	4 - 6 - 9	5 - 6 - 9	26	32	5.08	93	57.9	73.4	1.2 - 1.9 - 2.7	1.4 - 2.0 - 2.8
	1200	236	0.335	.425	5 - 7 - 10	6 - 7 - 10	32	38	6.10	111	83.4	105.7	1.5 - 2.1 - 3.0	1.7 - 2.1 - 3.0
	1400	275	0.456	.578	6 - 7 - 11	6 - 8 - 11	37	42	7.11	130	113.5	143.9	1.7 - 2.3 - 3.2	1.9 - 2.3 - 3.3
	1600	314	0.595	.755	7 - 8 - 11	7 - 8 - 12	41	46	8.13	148	148.2	188.0	2.0 - 2.4 - 3.4	2.0 - 2.5 - 3.5
	1800	353	0.753	.955	7 - 8 - 12	7 - 9 - 12	45	50	9.14	167	187.6	237.9	2.1 - 2.6 - 3.6	2.1 - 2.6 - 3.7
8" Dia.	2000	393	0.930	1.180	7 - 9 - 13	7 - 9 - 13	48	53	10.16	185	231.6	293.7	2.2 - 2.7 - 3.8	2.3 - 2.8 - 3.9
	200	70	0.009	.012	1 - 2 - 3	1 - 2 - 4	-	-	1.02	33	2.3	2.9	0.3 - 0.5 - 1.0	0.4 - 0.6 - 1.1
	600	209	0.084	.106	3 - 5 - 9	4 - 6 - 9	12	19	3.05	99	20.8	26.4	1.0 - 1.5 - 2.8	1.1 - 1.7 - 2.9
	800	279	0.149	.189	4 - 7 - 11	5 - 8 - 11	21	28	4.06	132	37.1	47.0	1.3 - 2.0 - 3.2	1.5 - 2.3 - 3.3
	1000	349	0.233	.295	5 - 8 - 12	6 - 9 - 12	28	34	5.08	165	57.9	73.4	1.7 - 2.5 - 3.6	1.9 - 2.6 - 3.7
	1200	419	0.335	.425	7 - 9 - 13	8 - 9 - 13	34	39	6.10	198	83.4	105.7	2.0 - 2.8 - 4.0	2.3 - 2.9 - 4.0
	1400	489	0.456	.578	8 - 10 - 14	8 - 10 - 14	39	44	7.11	231	113.5	143.9	2.3 - 3.0 - 4.3	2.5 - 3.1 - 4.4
	1600	559	0.595	.755	9 - 11 - 15	9 - 11 - 15	44	48	8.13	264	148.2	188.0	2.6 - 3.2 - 4.6	2.7 - 3.3 - 4.7
10" Dia.	1800	628	0.753	.955	9 - 11 - 16	9 - 12 - 16	47	51	9.14	297	187.6	237.9	2.8 - 3.4 - 4.8	2.9 - 3.5 - 5.0
	2000	698	0.930	1.180	10 - 12 - 17	10 - 12 - 17	51	54	10.16	329	231.6	293.7	3.0 - 3.6 - 5.1	3.0 - 3.7 - 5.2
	400	218	0.037	.047	3 - 4 - 8	3 - 5 - 9	-	-	2.03	103	9.3	11.7	0.8 - 1.2 - 2.5	1.0 - 1.4 - 2.9
	600	327	0.084	.106	4 - 6 - 12	5 - 7 - 12	14	20	3.05	154	20.8	26.4	1.2 - 1.9 - 3.5	1.4 - 2.1 - 3.6
	800	436	0.149	.189	5 - 8 - 13	6 - 9 - 14	23	29	4.06	206	37.1	47.0	1.7 - 2.5 - 4.0	1.9 - 2.9 - 4.1
	1000	545	0.233	.295	7 - 10 - 15	8 - 11 - 15	30	35	5.08	257	57.9	73.4	2.1 - 3.1 - 4.5	2.4 - 3.3 - 4.6
	1200	654	0.335	.425	8 - 12 - 16	9 - 12 - 17	36	41	6.10	309	83.4	105.7	2.5 - 3.5 - 4.9	2.9 - 3.6 - 5.1
	1400	764	0.456	.578	10 - 12 - 18	10 - 13 - 18	41	45	7.11	360	113.5	143.9	2.9 - 3.8 - 5.3	3.2 - 3.9 - 5.5
12" Dia.	1600	873	0.595	.755	11 - 13 - 19	11 - 14 - 19	45	49	8.13	412	148.2	188.0	3.3 - 4.0 - 5.7	3.4 - 4.1 - 5.8
	1800	982	0.753	.955	12 - 14 - 20	12 - 14 - 20	49	52	9.14	463	187.6	237.9	3.5 - 4.3 - 6.1	3.6 - 4.4 - 6.2
	1900	1036	0.839	1.065	12 - 14 - 20	12 - 15 - 21	51	54	9.65	489	209.0	265.1	3.6 - 4.4 - 6.2	3.7 - 4.5 - 6.4
	200	157	0.009	.012	2 - 2 - 5	2 - 3 - 6	-	-	1.02	74	2.3	2.9	0.5 - 0.7 - 1.5	0.6 - 0.9 - 1.7
	500	393	0.058	.074	4 - 6 - 12	5 - 7 - 13	-	16	2.54	185	14.5	18.4	1.2 - 1.9 - 3.7	1.4 - 2.1 - 3.9
	800	628	0.149	.189	7 - 10 - 16	8 - 11 - 16	25	30	4.06	297	37.1	47.0	2.0 - 3.0 - 4.8	2.3 - 3.4 - 5.0
	900	707	0.188	.239	7 - 11 - 17	8 - 12 - 17	29	33	4.57	334	46.9	59.5	2.2 - 3.3 - 5.1	2.6 - 3.7 - 5.3
	1000	785	0.233	.295	8 - 12 - 18	9 - 13 - 18	32	36	5.08	371	57.9	73.4	2.5 - 3.7 - 5.4	2.9 - 3.9 - 5.5
14" Dia.	1100	864	0.281	.357	9 - 13 - 19	10 - 14 - 19	35	39	5.59	408	70.1	88.8	2.7 - 4.0 - 5.7	3.1 - 4.1 - 5.8
	1200	942	0.335	.425	10 - 14 - 20	11 - 14 - 20	38	42	6.10	445	83.4	105.7	3.0 - 4.2 - 5.9	3.4 - 4.3 - 6.1
	1400	1100	0.456	.578	11 - 15 - 21	12 - 15 - 22	43	46	7.11	519	113.5	143.9	3.5 - 4.5 - 6.4	3.8 - 4.6 - 6.6
	1600	1257	0.595	.755	13 - 16 - 23	13 - 16 - 23	47	50	8.13	593	148.2	188.0	4.0 - 4.8 - 6.9	4.0 - 5.0 - 7.0
	200	214	0.009	.012	2 - 3 - 6	2 - 3 - 7	-	-	1.02	101	2.3	2.9	0.6 - 0.9 - 1.7	0.7 - 1.0 - 2.0
	400	428	0.037	.047	4 - 6 - 11	4 - 7 - 13	-	11	2.03	202	9.3	11.7	1.2 - 1.7 - 3.5	1.3 - 2.0 - 4.0
	600	641	0.084	.106	6 - 9 - 16	7 - 10 - 16	17	22	3.05	303	20.8	26.4	1.7 - 2.6 - 4.9	2.0 - 3.0 - 5.0
	800	855	0.149	.189	8 - 11 - 19	9 - 13 - 19	26	31	4.06	404	37.1	47.0	2.3 - 3.5 - 5.7	2.7 - 4.0 - 5.8
16" Dia.	900	962	0.188	.239	9 - 13 - 20	10 - 14 - 20	30	34	4.57	454	46.9	59.5	2.6 - 3.9 - 6.0	3.0 - 4.3 - 6.1
	1000	1069	0.233	.295	10 - 14 - 21	11 - 15 - 21	33	37	5.08	505	57.9	73.4	2.9 - 4.3 - 6.3	3.3 - 4.6 - 6.5
	1100	1176	0.281	.357	10 - 15 - 22	12 - 16 - 22	36	40	5.59	555	70.1	88.8	3.2 - 4.7 - 6.6	3.7 - 4.8 - 6.8
	1200	1283	0.335	.425	11 - 16 - 23	13 - 16 - 23	39	42	6.10	605	83.4	105.7	3.5 - 4.9 - 6.9	4.0 - 5.0 - 7.1
	1400	1497	0.456	.578	13 - 17 - 25	15 - 18 - 25	44	47	7.11	706	113.5	143.9	4.0 - 5.3 - 7.5	4.4 - 5.4 - 7.7
	200	279	0.009	.012	2 - 3 - 7	3 - 4 - 8	-	-	1.02	132	2.3	2.9	0.7 - 1.0 - 2.0	0.8 - 1.1 - 2.3
	400	559	0.037	.047	4 - 7 - 13	5 - 8 - 15	-	11	2.03	264	9.3	11.7	1.3 - 2.0 - 4.0	1.5 - 2.3 - 4.6
	600	838	0.084	.106	7 - 10 - 18	8 - 11 - 19	18	23	3.05	395	20.8	26.4	2.0 - 3.0 - 5.6	2.3 - 3.4 - 5.7
18" Dia.	800	1117	0.149	.189	9 - 13 - 21	10 - 15 - 22	27	31	4.06	527	37.1	47.0	2.6 - 4.0 - 6.5	3.0 - 4.6 - 6.6
	900	1257	0.188	.239	10 - 15 - 23	11 - 16 - 23	31	35	4.57	593	46.9	59.5	3.0 - 4.5 - 6.9	3.4 - 5.0 - 7.0
	1000	1396	0.233	.295	11 - 16 - 24	13 - 17 - 24	34	38	5.08	659	57.9	73.4	3.3 - 5.0 - 7.2	3.8 - 5.2 - 7.4
	1100	1536	0.281	.357	12 - 18 - 25	14 - 18 - 25	38	41	5.59	725	70.1	88.8	3.6 - 5.4 - 7.6	4.2 - 5.5 - 7.8
	1200	1676	0.335	.425	13 - 18 - 26	15 - 19 - 27	40	43	6.10	791	83.4	105.7	4.0 - 5.6 - 7.9	4.6 - 5.7 - 8.1
	1400	1955	0.456	.578	15 - 20 - 28	17 - 20 - 29	45	48	7.11	923	113.5	143.9	4.6 - 6.0 - 8.6	5.0 - 6.2 - 8.7

NOTES: Throw values are given for isothermal conditions and terminal velocities of 150, 100, and 50 FPM (0.75, 0.50, and 0.25 m/s). NC values are based on octave band 2 - 7 sound power levels minus a room absorption of 10dB, re 10⁻¹² Watts. Dash in space denotes a NC value of less than 10. Data was obtained from tests conducted in accordance with ANSI/ASHRAE Standard 70, ISO Standard 5219, and ISO Standard 3741. See selection software for performance data not shown, including octave band data.

© KRUEGER 2012

RM1, 5RM1 Performance Data: Horizontal Throw

IP/METRIC DATA: RM1, 5RM1 (NO DAMPER)

	IP Data								Metric Data							
	Neck Vel	Air Flow	Position 2		Position 1 Throw	Position 2 Throw	Pos 1	Pos 2	Neck Vel	Air Flow	Position 2		Position 1 Throw	Position 2 Throw		
			Ps	Pt							Ps	Pt				
	FPM	CFM	"WG	"WG	ft	ft	NC	NC	m/s	L/s	Pa	Pa	m	m		
18" Dia.	200	353	0.009	.012	2 - 4 - 7	3 - 4 - 8	-	-	1.02	167	2.3	2.9	0.7 - 1.1 - 2.2	0.9 - 1.3 - 2.6		
	400	707	0.037	.047	5 - 7 - 15	6 - 8 - 17	-	12	2.03	334	9.3	11.7	1.5 - 2.2 - 4.5	1.7 - 2.6 - 5.1		
	600	1060	0.084	.106	7 - 11 - 21	8 - 13 - 21	19	24	3.05	500	20.8	26.4	2.2 - 3.3 - 6.3	2.6 - 3.9 - 6.4		
	800	1414	0.149	.189	10 - 15 - 24	11 - 17 - 24	28	32	4.06	667	37.1	47.0	3.0 - 4.5 - 7.3	3.4 - 5.1 - 7.4		
	900	1590	0.188	.239	11 - 17 - 25	13 - 18 - 26	32	36	4.57	751	46.9	59.5	3.3 - 5.0 - 7.7	3.9 - 5.6 - 7.9		
	1000	1767	0.233	.295	12 - 18 - 27	14 - 19 - 27	35	39	5.08	834	57.9	73.4	3.7 - 5.6 - 8.1	4.3 - 5.9 - 8.3		
	1100	1944	0.281	.357	13 - 20 - 28	16 - 20 - 29	39	41	5.59	917	70.1	88.8	4.1 - 6.0 - 8.5	4.7 - 6.2 - 8.7		
	1200	2121	0.335	.425	15 - 21 - 29	17 - 21 - 30	41	44	6.10	1001	83.4	105.7	4.5 - 6.3 - 8.9	5.1 - 6.4 - 9.1		
20" Dia. *	1400	2474	0.456	.578	17 - 22 - 32	19 - 23 - 32	46	48	7.11	1168	113.5	143.9	5.2 - 6.8 - 9.6	5.7 - 7.0 - 9.8		
	200	436	0.009	.012	3 - 4 - 8	3 - 5 - 9	-	-	1.02	206	2.3	2.9	0.8 - 1.2 - 2.5	1.0 - 1.4 - 2.9		
	400	873	0.037	.047	5 - 8 - 16	6 - 9 - 19	-	13	2.03	412	9.3	11.7	1.7 - 2.5 - 5.0	1.9 - 2.9 - 5.7		
	600	1309	0.084	.106	8 - 12 - 23	9 - 14 - 24	20	24	3.05	618	20.8	26.4	2.5 - 3.7 - 7.0	2.9 - 4.3 - 7.2		
	800	1745	0.149	.189	11 - 16 - 27	13 - 19 - 27	29	33	4.06	824	37.1	47.0	3.3 - 5.0 - 8.1	3.8 - 5.7 - 8.3		
	900	1963	0.188	.239	12 - 18 - 28	14 - 20 - 29	33	36	4.57	927	46.9	59.5	3.7 - 5.6 - 8.6	4.3 - 6.2 - 8.8		
	1000	2182	0.233	.295	14 - 20 - 30	16 - 21 - 30	36	39	5.08	1030	57.9	73.4	4.1 - 6.2 - 9.0	4.8 - 6.5 - 9.2		
	1100	2400	0.281	.357	15 - 22 - 31	17 - 23 - 32	39	42	5.59	1133	70.1	88.8	4.5 - 6.7 - 9.5	5.2 - 6.9 - 9.7		
24" Dia. *	1200	2618	0.335	.425	16 - 23 - 33	19 - 24 - 33	42	45	6.10	1236	83.4	105.7	5.0 - 7.0 - 9.9	5.7 - 7.2 - 10.1		
	1400	3054	0.456	.578	19 - 25 - 35	21 - 25 - 36	47	49	7.11	1441	113.5	143.9	5.8 - 7.6 - 10.7	6.3 - 7.7 - 10.9		
	200	628	0.009	.012	3 - 5 - 10	4 - 6 - 11	-	-	1.02	297	2.3	2.9	1.0 - 1.5 - 3.0	1.1 - 1.7 - 3.4		
	400	1257	0.037	.047	7 - 10 - 20	8 - 11 - 23	-	14	2.03	593	9.3	11.7	2.0 - 3.0 - 5.9	2.3 - 3.4 - 6.9		
	600	1885	0.084	.106	10 - 15 - 28	11 - 17 - 28	22	25	3.05	890	20.8	26.4	3.0 - 4.5 - 8.4	3.4 - 5.1 - 8.6		
	800	2513	0.149	.189	13 - 20 - 32	15 - 23 - 33	31	34	4.06	1186	37.1	47.0	4.0 - 5.9 - 9.7	4.6 - 6.9 - 9.9		
	900	2827	0.188	.239	15 - 22 - 34	17 - 24 - 35	35	37	4.57	1334	46.9	59.5	4.5 - 6.7 - 10.3	5.1 - 7.4 - 10.5		
	1000	3142	0.233	.295	16 - 24 - 36	19 - 26 - 36	38	40	5.08	1483	57.9	73.4	5.0 - 7.4 - 10.8	5.7 - 7.8 - 11.1		
30" Dia. *	1100	3456	0.281	.357	18 - 26 - 37	21 - 27 - 38	41	43	5.59	1631	70.1	88.8	5.5 - 8.0 - 11.4	6.3 - 8.2 - 11.6		
	1200	3770	0.335	.425	20 - 28 - 39	23 - 28 - 40	44	46	6.10	1779	83.4	105.7	5.9 - 8.4 - 11.9	6.9 - 8.6 - 12.1		
	1400	4398	0.456	.578	23 - 30 - 42	25 - 31 - 43	49	50	7.11	2076	113.5	143.9	6.9 - 9.1 - 12.8	7.6 - 9.3 - 13.1		
	200	982	0.009	.012	4 - 6 - 12	5 - 7 - 14	-	-	1.02	463	2.3	2.9	1.2 - 1.9 - 3.7	1.4 - 2.1 - 4.3		
	400	1963	0.037	.047	8 - 12 - 24	9 - 14 - 28	-	15	2.03	927	9.3	11.7	2.5 - 3.7 - 7.4	2.9 - 4.3 - 8.6		
	600	2945	0.084	.106	12 - 18 - 35	14 - 21 - 35	23	27	3.05	1390	20.8	26.4	3.7 - 5.6 - 10.5	4.3 - 6.4 - 10.7		
	800	3927	0.149	.189	16 - 24 - 40	19 - 28 - 41	33	35	4.06	1853	37.1	47.0	5.0 - 7.4 - 12.1	5.7 - 8.6 - 12.4		
	900	4418	0.188	.239	18 - 28 - 42	21 - 31 - 43	37	38	4.57	2085	46.9	59.5	5.6 - 8.4 - 12.9	6.4 - 9.3 - 13.1		
36" Dia. *	1000	4909	0.233	.295	20 - 31 - 45	23 - 32 - 46	40	41	5.08	2317	57.9	73.4	6.2 - 9.3 - 13.6	7.1 - 9.8 - 13.9		
	1100	5400	0.281	.357	22 - 33 - 47	26 - 34 - 48	43	44	5.59	2548	70.1	88.8	6.8 - 10.1 - 14.2	7.9 - 10.3 - 14.5		
	1200	5890	0.335	.425	24 - 35 - 49	28 - 35 - 50	46	47	6.10	2780	83.4	105.7	7.4 - 10.5 - 14.8	8.6 - 10.7 - 15.2		
	1400	6872	0.456	.578	29 - 37 - 53	31 - 38 - 54	51	51	7.11	3243	113.5	143.9	8.7 - 11.3 - 16.0	9.5 - 11.6 - 16.4		
	200	1414	0.009	.012	5 - 7 - 15	6 - 8 - 17	-	-	1.02	667	2.3	2.9	1.5 - 2.2 - 4.5	1.7 - 2.6 - 5.1		
	400	2827	0.037	.047	10 - 15 - 29	11 - 17 - 34	12	16	2.03	1334	9.3	11.7	3.0 - 4.5 - 8.9	3.4 - 5.1 - 10.3		
	600	4241	0.084	.106	15 - 22 - 41	17 - 25 - 42	25	28	3.05	2002	20.8	26.4	4.5 - 6.7 - 12.6	5.1 - 7.7 - 12.9		
	800	5655	0.149	.189	20 - 29 - 48	23 - 34 - 49	34	36	4.06	2669	37.1	47.0	5.9 - 8.9 - 14.5	6.9 - 10.3 - 14.9		
36" Dia. *	900	6362	0.188	.239	22 - 33 - 51	25 - 37 - 52	38	39	4.57	3002	46.9	59.5	6.7 - 10.0 - 15.4	7.7 - 11.2 - 15.8		
	1000	7069	0.233	.295	24 - 37 - 54	28 - 39 - 55	41	43	5.08	3336	57.9	73.4	7.4 - 11.2 - 16.3	8.6 - 11.8 - 16.6		
	1100	7775	0.281	.357	27 - 40 - 56	31 - 41 - 57	45	45	5.59	3670	70.1	88.8	8.2 - 12.1 - 17.1	9.4 - 12.3 - 17.4		
	1200	8482	0.335	.425	29 - 41 - 59	34 - 42 - 60	47	48	6.10	4003	83.4	105.7	8.9 - 12.6 - 17.8	10.3 - 12.9 - 18.2		
	1400	9896	0.456	.578	34 - 45 - 63	37 - 46 - 65	52	52	7.11	4670	113.5	143.9	10.4 - 13.6 - 19.2	11.4 - 13.9 - 19.7		

NOTES: Throw values are given for isothermal conditions and terminal velocities of 150, 100, and 50 FPM (0.75, 0.50, and 0.25 m/s). NC values are based on octave band 2 - 7 sound power levels minus a room absorption of 10dB, re 10⁻¹² Watts. Dash in space denotes a NC value of less than 10. Data was obtained from tests conducted in accordance with ANSI/ASHRAE Standard 70, ISO Standard 5219, and ISO Standard 3741. See selection software for performance data not shown, including octave band data.

* Available in model RM1 only.

RM1, 5RM1 Suggested Specification & Configuration

1. SERIES: (XXXX)

RM1 - 2-Position Round, Steel Diffuser
 5RM1 - 2-Position Round, Aluminum Diffuser

2. INLET: (XX) *

6" - 20" in 2" Increments, 24", 30", or 36"

3. DAMPER: (XX)

00 - NONE
 03 - PR10
 04 - PRD10
 06 - PR12
 08 - PRN100

4. ACCESSORIES: (X) **

0 - No Accessories
 C - Safety Cable
 R - Round Straightening Grid

5. FINISH: (XX)

01 - Mill
 10 - Alumican
 35 - Black
 44 - British White

* Largest inlet size available for 5RM1 is 18".

** Safety cable included on all units with 12" or greater neck size.

RM1, 5RM1

The round ceiling diffuser shall be Krueger model RM1 (steel) or 5RM1 (aluminum). The RM1 and 5RM1 models shall be constructed of 3-cones. The inner 2-cone assembly shall be adjustable to provide 2 different horizontal discharge settings and be easily removable using a spring locking mechanism. The removable core shall be supported by a safety cable to provide ease of installation and maintenance for neck sizes 14" and larger. Diffusers shall be constructed of 18 gage steel (RM1) or 0.051" aluminum (5RM1).

Optional round damper shall be constructed of heavy gage steel. Damper shall be operable from the face of the diffuser.

PERFORMANCE

The manufacturer shall provide published (printed or electronic) performance data for the diffuser. Performance data shall include 2 - 7 octave band sound power levels. The diffuser shall be tested in accordance to the data standards at the time of product introduction or ANSI/ASHRAE Standard 70.

FINISH

The paint finish shall be #44 British White and be an anodic acrylic paint, baked at 315°F for 30 minutes. The paint thickness shall be 0.8 – 1.0 mils, gloss at 60° per ASTM D523-89 of 50 – 85%, pencil hardness per ASTM D3363-92A of HB – H, crosshatch adhesion per ASTM D3359-83 of 4B – 5B, impact per ASTM D2794-93 of direct impact >100 in/lb and reverse impact >80 in/lb, salt spray per ASTM B117-9048 of 96 hours, humidity per ASTM D2247-92 of >500 hours and water soak per ASTM D870-92 of 250 hours.