



## Natural Gas Engine-Driven Chillers Water-Cooled STx / DTx Series



DTx Series  
300, 350

### Key Features & Benefits



A 02451

81-66-6400

# WATER-COOLED CHILLERS

Full Load Rating [tons]	
IPLV COP <sup>2</sup>	
Full Load COP <sup>2</sup>	
COP with Total Heat Recovery	
Fuel Consumption [MBtu/hr @ HHV 1020 Btu/scf]	
Fuel Consumption [scfh]	
Fuel Pressure [in. wc, 27.703 in. wc = 1 psig]	
Available Total Heat Recovery [MBtu/hr]	
Maximum Supply Temperature [°F]	

## WATER SYSTEMS

Chilled Water Flow [GPM]	
Chilled Water Pressure Drop @ Rated Flow [ft]	
Total Cooling Tower Flow [GPM]	
- Flow To Condenser Only [GPM]	
- Flow To Dump HX Only [GPM]	
Condenser Pressure Drop @ Rated Flow [ft]	
Cooling Tower Heat Rejection [MBtu/hr]	

## ELECTRICAL REQUIREMENT

Voltage Requirement	
Electrical Service	
Amperage Rating	
Parasitic Power Requirement [kW]	

## ACOUSTIC LEVELS [dBA @ 3 ft]

- with Enclosure	
- without Enclosure	
Refrigerant	

## DIMENSIONAL DATA

Length	
Width	
Height	

## WEIGHTS

Rigging Weight [lb]	
Operational Weight [lb]	

## DRIVELINE

Engine	
Compressor	

## STx SERIES

CH-150x	CH-200x
150	200
2.6	2.6
1.7	1.6
2.2	2.1
1,032	1,526
1,012	1,496
4-12	4-12
516	730
214	229

360	480
9.1	16.2
490	640
450	600
40	40
13.0	23.1
2,418	3,473

208-230, 50/60 Hz
Single Phase with Neutral
30
2.2

85	89
92	96
HFC-134a	

13'10"
4'4"
6'9"

10,950
11,750

TecoDrive 7400
J&E Hall HS2024GED

## DTx SERIES

CH-300x	CH-350x	CH-400x
300	350	400
2.6	2.6	2.6
1.7	1.7	1.6
2.1	2.1	2.1
2,157	2,529	3,052
2,115	2,479	2,992
4-12	4-12	4-12
1,032	1,210	1,460
214	220	229

720	840	960
7.2	9.6	12.6
980	1,130	1,280
900	1,050	1,200
80	80	80
12.9	14.1	18.1
5,376	6,136	6,946

208-230, 50/60 Hz
Single Phase with Neutral
40
2.7

88	89	92
95	96	99
HFC-134a		

14'3"
7'0"
7'7"

21,900
23,650

TecoDrive 7400 (2)
J&E Hall HS2024GED (2)


### NOTES:


1. Specifications subject to change without notice, all specifications are  $\pm 5\%$ .
2. COP ratings are based upon Fuel Higher Heating Value (HHV) @ 1020 BTU/SCF

## Outstanding TECOCHILL Features

- TecoDrive 7000™ natural gas engine
- Engine and exhaust heat recovery
- Single screw balance action compressor
- High efficiency flooded evaporator
- IPLV exceeding 2.5
- Footprint equivalent to electric chillers
- Variable engine speed operation for excellent part load performance and longer life
- TecoNET™ microprocessor-based control system with precise PID control for fully automatic operation, continuous system monitoring, digital display, fault diagnostics and tie-in to an energy management system
- Remote Monitoring Control System (RMCS) that permits remote real-time monitoring, data acquisition and system control by telephone or internet

## TYPICAL TECOCHILL PART-LOAD PERFORMANCE

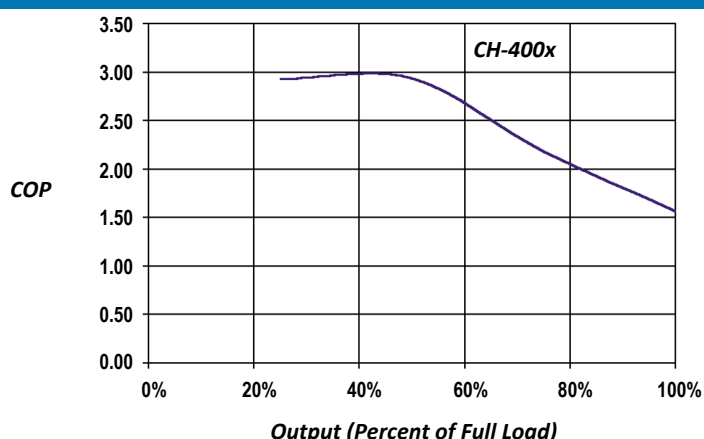

**Tecogen**   
Advanced Modular CHP Systems



Made In The USA

**TECOGEN® TECOCHILL®** and TecoDrive™ are trademarks of Tecogen